


REFER TO STD. TE730 FOR ADDITIONAL INFORMATION ON
TEMPORARY TRAFFIC CONTROL SIGNS AND SIGN SPACING.
REFER TO STD. TE704 FOR TYPE III BARRICADES.
REFER TO STD. TE702 FOR INFORMATION ON TAPERS AND
CHANNELIZING DEVICES.
REFER TO STD. TE700 FOR LENGTH OF BUFFER SPACE.

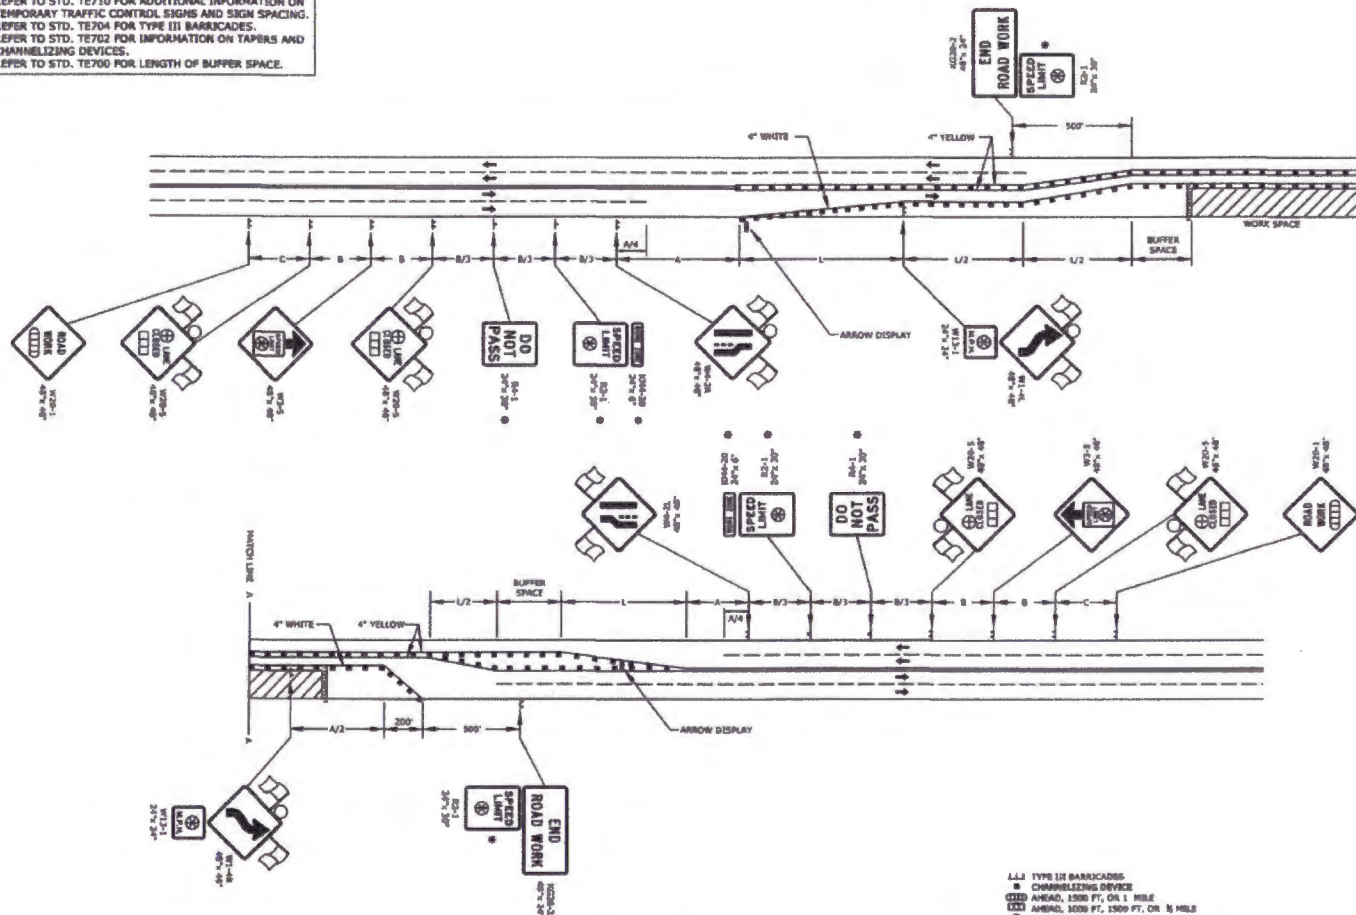

* FOR SPEEDS GREATER THAN 45 MPH USE
FREEWAY / EXPRESSWAY SIZE SIGNS.

1.1 TYPE III BARRICADE
 ■ CHANNELIZING DEVICE
 (11) AHEAD, 1500 FT, OR 1 MILE
 (11) AHEAD, 1000 FT, 1500 FT, OR 1/2 MILE
 ● RIGHT OR LEFT
 ● SPEED TO BE DETERMINED BY THE ENGINEER
 ○ TYPE "A" LOW INTENSITY WARNING LIGHT

This Sheet is adapted from KDOT Standard Sheet TE74B.

[illegible]

LA 95-10422

Design & Construction Management
The University of Kansas
St. Andrews Office Facility
1515 St. Andrews Drive
Lawrence, Kansas 66047
Telephone 785-843-5421 Fax 785-843-5644

THE UNIVERSITY OF KANSAS
IRVING HILL ROAD
BRIDGE IMPROVEMENTS PROJECT
LAWRENCE, KS 66047

TRAFFIC CONT
DETAILS

TE748

ORIGINAL
CONSTRUCTIVE
DOCUMENTS