

INDEX OF SHEETS

- Title Sheet
- 3. Typical Sections with Milling and Overlay Details
- Miscellaneous Details
- 7. Milling and Overlay Plan Sheets
- Summary of Surfacing Quantities
- 11. Pavement Marking Plan Sheets
- Standard Pavement Marking Details
- Summary and Recapitulation of Pavement Marking Quantities
- Video Detection System Installation On Existing Traffic Signals
- 17. Traffic Signal Specifications
- 25. Traffic Control

STATE OF KANSAS

DEPARTMENT OF TRANSPORTATION

KLINK 1R RESURFACING PROJECT FY 2011

23RD STREET (K-10 HWY.)-FROM A POINT 629.12' WEST OF

HASKELL AVENUE TO A POINT 682.2' EAST OF ANDERSON ROAD

CITY OF LAWRENCE, KANSAS


DOUGLAS COUNTY

FHWA REG NO.	STATE	PROJECT NO.	YEAR	SHEET NO.	TOTAL SHEETS
7	KANSAS	10-23 U-2205-01	2011	1	25

-2 INCH MILL AND 2 INCH OVERLAY
-COLD PLASTIC PAVEMENT MARKING
-HEAT FUSED, PREFORMED, THERMOPLASTIC PAVEMENT MARKING
-PAVEMENT PATCHING

THERE IS NON-PARTICIPATING WORK TO BE PERFORMED AS PART OF THIS CONTRACT.
IT INCLUDES:
-OVERLAY OF SOME CONCRETE CURB AND GUTTER ALONG PROJECT.

NOTE: TRAFFIC SHALL BE CARRIED THROUGH CONSTRUCTION. DURING THE MILLING,
OVERLAY AND PAVEMENT MARKING OPERATIONS. ACCESS TO ADJACENT PROPERTIES
SHALL BE MAINTAINED DURING THOSE TIMES.

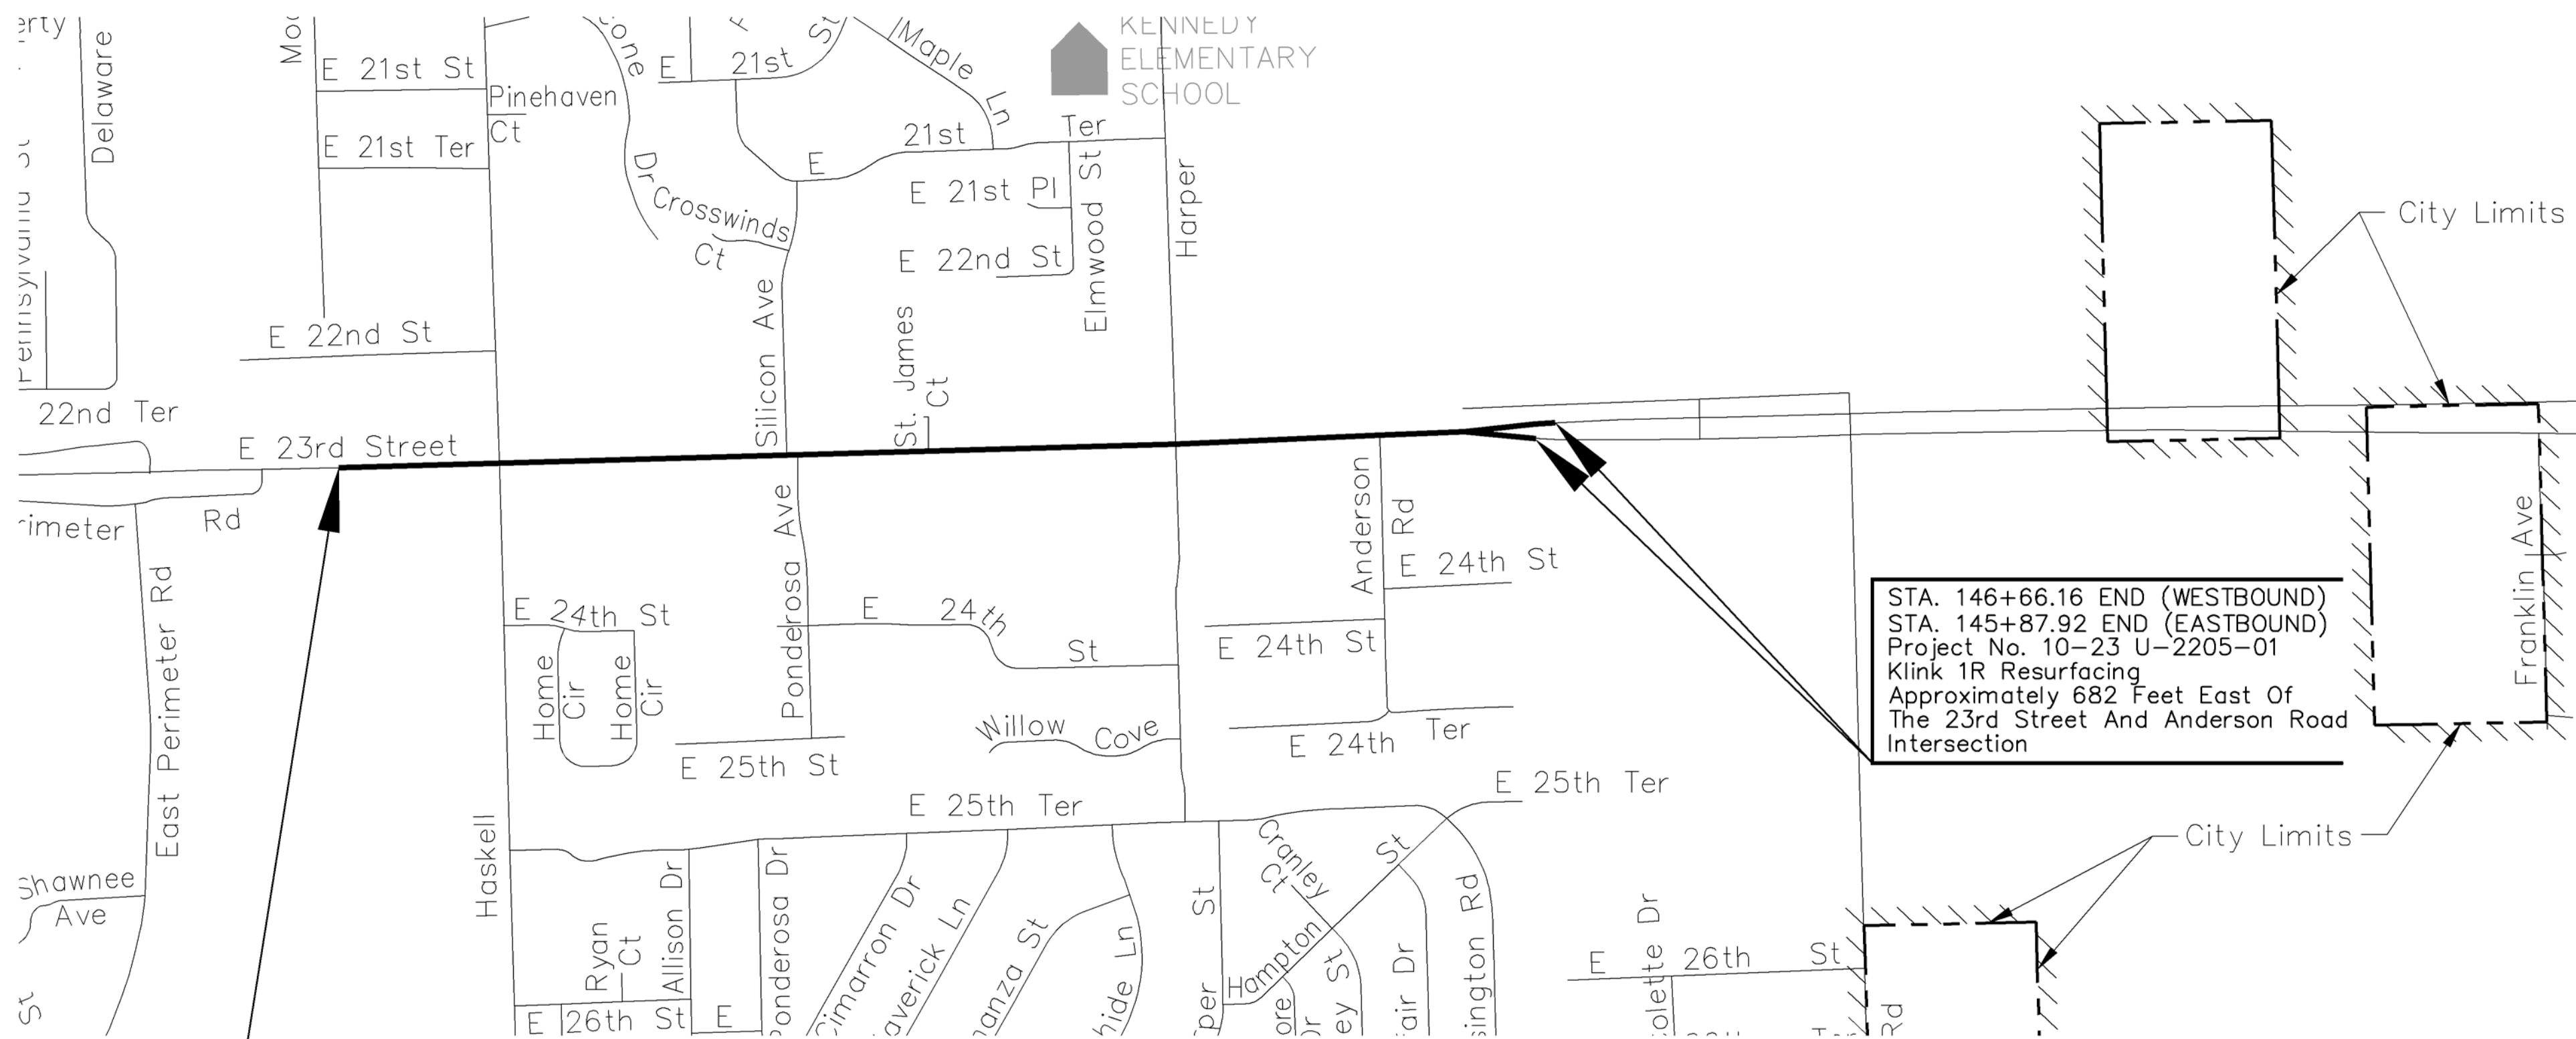


AADT (23rd Street) = 30,000
Posted Speed Limits:
From 629.12' West Of
Haskell Avenue To 682.2' West
Of Anderson Road=45mph
Percentage Of Truck Traffic: 6%

STA. 99+25.65 BEGIN
Project No. 10-23 U-2205-01
Klink 1R Resurfacing
Near 23rd Street and Haskell Avenue
Street Intersection

STA. 146+66.16 END (WESTBOUND)
STA. 145+87.92 END (EASTBOUND)
Project No. 10-23 U-2205-01
Klink 1R Resurfacing
Approximately 682 Feet East Of
The 23rd Street And Anderson Road
Intersection

Scale: 1"=500'

LOCATION FOR
'PRELIMINARY PLANS'
STAMP

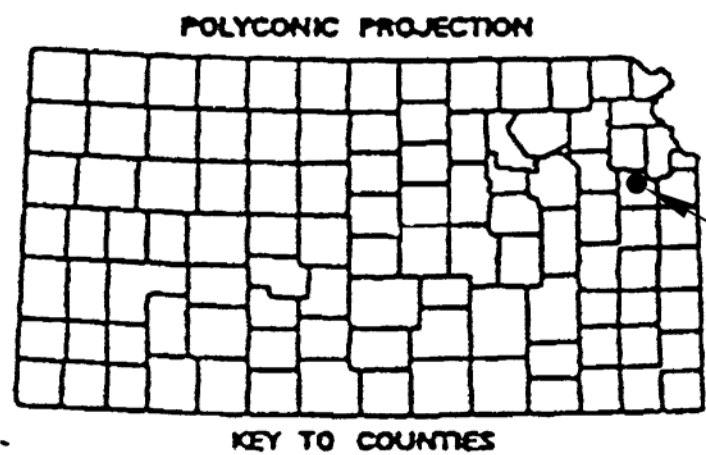

CITY OF LAWRENCE
2008 POPULATION: 90,520


LEGEND

- 100 Project Baseline
- Construction Limits (Participating Item)
- Construction Limits (Non-Participating Item)
- Existing Water Valve Box To Be Adjusted. See Miscellaneous Details Sheet For Information
- Existing Water Meter Box To Be Adjusted. See Miscellaneous Details Sheet For Information
- Existing Sanitary Sewer Manhole To Be Adjusted. See Miscellaneous Details Sheet For Information
- Existing Storm Sewer Manhole To Be Adjusted. See Miscellaneous Details Sheet For Information
- Existing AT&T Manhole (To Be Adjusted BY OTHERS) See Miscellaneous Details Sheet For Information
- Existing Section Corner Monument Box

UTILITY OWNER	UTILITY TYPE	CONTACT PERSON	PHONE NUMBER	EMAIL ADDRESS
Black Hills Energy	Gas	Charles C. Hoag	(785) 832-3944	chuck.hoag@blackhillscorp.com
Sunflower Broadband	Cable	Tim Templeton	(785) 312-6960	ttempleton@sunflowerbroadband.com
AT&T	Telephone	Kimball E. Parker	(785) 276-6142	kp3805@att.com
City of Lawrence - PW	Stormwater	Matt Bond	(785) 832-3142	mbond@ci.lawrence.ks.us
Westar Energy	Electric	Max F. Garcia	(785) 865-4850	Max.F.Garcia@WestarEnergy.com
City of Lawrence - Utilities	Water & Sewer	Philip Ciesielski	(785) 832-7831	pciesielski@ci.lawrence.ks.us
Lightcore	Communication		(866)562-4349	
Southern Star Central Gas	Gas		(800)324-9696	

K-10 HWY. (23RD STREET)

GROSS LENGTH OF PROJECT	4,740.51 ft.	0.90 mi.
NET LENGTH OF BRIDGES	0.00 ft.	0.00 mi.
NET LENGTH OF PROJECT	4,740.51 ft.	0.90 mi.

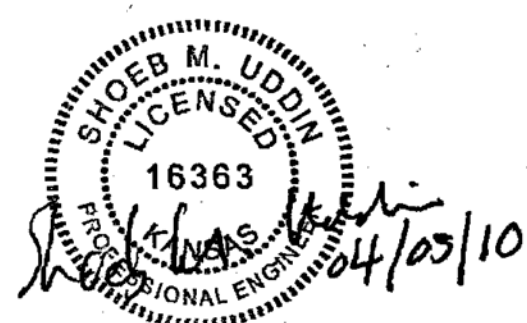

RECOM. FOR APPROVAL - DATE
CHIEF BUREAU OF TRAFFIC ENGINEERING KANSAS DEPARTMENT OF TRANSPORTATION
APPROVED - DATE
STATE TRANSPORTATION ENGINEER KANSAS DEPARTMENT OF TRANSPORTATION

RECOM. FOR APPROVAL-DATE
FEDERAL HIGHWAY ADMINISTRATION DEPARTMENT OF TRANSPORTATION
RECOM. FOR APPROVAL - DATE
CITY ENGINEER CITY OF LAWRENCE, KANSAS

City Project No. PW1001